

FORM PTO-1390 (Modified)
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

29093-03

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5)

09/889245

INTERNATIONAL APPLICATION NO.

PCT/US00/00989

INTERNATIONAL FILING DATE

14 JAN 2000 (14. 01. 00)

PRIORITY DATE CLAIMED

14 JAN 99 (14. 01.99)

TITLE OF INVENTION

HAND HELD PROBE FOR MEASURING TIRE TREAD WEAR

APPLICANT(S) FOR DO/EO/US

Roger H. Tracy; Edwin H. Reeves; Nicholas J. Radclyffe; Robert Mark Longden

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☒ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☐ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)). (unsigned)
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210). (as part of WO publication)

I hereby certify that this paper or fee is being deposited with the U.S. Postal Service "Express Mail" Post Office to Address service under 37 CFR 1.10 on the date indicated below and addressed to the Commissioner of Patents and Trademarks, Washington, DC 20231.

*Brigid Mullen*DATE: 7-11-01EXPRESS MAIL NO. E38915810154

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98. (without art)
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☐ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☒ A ~~second~~ copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☒ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

Applicants qualify for small entity status under U.S. law.

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5) 09/889245		INTERNATIONAL APPLICATION NO. PCT/US00/00989		ATTORNEY'S DOCKET NUMBER 29093-03	
---	--	--	--	---	--

24. The following fees are submitted:				CALCULATIONS PTO USE ONLY	
BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) : <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1000.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$860.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$710.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$100.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	20 - 20 =	0	x \$18.00	\$0.00	
Independent claims	3 - 3 =	0	x \$80.00	\$0.00	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$100.00	
<input checked="" type="checkbox"/> Applicant claims small entity status. (See 37 CFR 1.27). The fees indicated above are reduced by 1/2.				\$50.00	
SUBTOTAL =				\$50.00	
Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				\$0.00	
TOTAL NATIONAL FEE =				\$50.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL FEES ENCLOSED =				\$50.00	
				Amount to be:	\$
				refunded	\$
				charged	\$

a.	<input checked="" type="checkbox"/>	A check in the amount of <u>\$50.00</u> to cover the above fees is enclosed.
b.	<input type="checkbox"/>	Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.
c.	<input checked="" type="checkbox"/>	The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>08-0719</u> A duplicate copy of this sheet is enclosed.
d.	<input type="checkbox"/>	Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Michael A. Mann
 NEXSEN PRUET JACOBS & POLLARD, LLC
 P.O. Drawer 2426
 Columbia, South Carolina 29202
 United States of America

SIGNATURE
J. Herbert O'Toole
 NAME
31,404
 REGISTRATION NUMBER
11 July 2001
 DATE

HAND HELD PROBE FOR MEASURING TIRE TREAD WEAR

1. Priority Claim:

This application claims the benefit of U.S. Provisional Application No. 60/115,915, filed on January 14, 1999, which is hereby incorporated by reference.

5 2. Field of the Invention:

The present invention relates to devices for measuring tire tread wear. More specifically, the present invention is a device for determining the tread profile by electro-optical measurements so that tread wear can be quantified.

3. Background of the Invention:

10 Tire treads are defined by a number of grooves or channels cut into the peripheral portion of the tire. The treads are the portions of the periphery that come into contact with the road.

Tire treads give tires traction in cornering and stopping. Tire treads, however, wear during the course of use. Eventually, treads wear to the point where their ability to provide 15 traction is compromised and the tire needs to be replaced or recapped.

Because tire treads wear slowly, and the amount of wear from day to day or week to week is imperceptible, frequent checking is unnecessary. Yet, unless a tire is checked for the depth of its treads at some reasonable interval, an excessively worn tire can be overlooked. Checking tire tread depth at intervals can allow a reasonably prediction as to 20 when the tire will need to be replaced. Furthermore, such a prediction cannot be made, and, indeed, the amount of tread remaining can be difficult to quantify, without a measurement.

Many states have requirements about the condition of the treads of a tire and require the replacement of tires when they become excessively worn. Fleet managers may have their own internal requirements for replacement of tires that are worn based on tread depth 25 or after a specified number of miles. Simple gauges or rulers are simply not accurate enough. Accurate measurement of tire tread depth is difficult to do without removing the tire and measuring the tread with special electro-optical measuring devices. See for example, the patents of Sube et al issued September 21, 1993, US No. 5,245,867, and Dory et al, issued October 5, 1993, US No. 5,249,460. In order to obtain an accurate 30 measurement, the tire is suspended so that it is not engaging a surface. These devices are expensive and require a good deal of time and effort for checking the depth of the tread of

a single tire. However, there remains a need for accurate tire tread depth measurement that does not have the defects of the prior art and that measures the profile of the tire tread so that tread depth can be quantified

SUMMARY OF THE INVENTION

5 According to its major aspects and briefly recited, the present invention is a probe for measuring the profile of a tire tread. A tire tread profile is a two-dimensional plot of the distance from each point on a fixed reference line running across the tire from side to side to the nearest point on the tire surface. This plot will show the differences in the distances to the line for the treads and the channels and thus the amount of wear on the treads. The
10 hand held probe comprises a housing with a slit formed parallel to its major axis, a handle attached to the proximal end of the housing, a range finder mounted inside the housing in such a way that it can traverse much of the length of the tube while directing light from a laser through a window mounted over the slit, and a bracket that is carried near the proximal end of the tube to enable the user to hold the probe in position against the tire. The output
15 from the device is via a computer port proximate to the handle or an IR or RF transmitter from the end of the handle. Power is supplied to the device by batteries in the handle.

The housing of the probe is placed against the tire with the slit and its window facing the tread. Preferably, the housing has an concave arcuate portion formed therein to define two edges of the housing that can act as supports on either side of the window to rest against
20 the tire. When the device is pushed laterally toward the near side of the tire until it engages the tire, the device is then stabilized and in position to make a measurement. With the housing thus in position, the reference line with respect to the tire is set. The device is activated by pressing an "on" button, causing the range finder to determine the distance from the range finder to the tire as the range finder slowly traverses the length of the
25 housing. The distance data -- in terms of x and y coordinates -- is fed to the computer via either the computer port on the proximal end of the housing or the IR or RF window on the end of the handle. The computer can display the distance to the tread and to channels between treads as output, thus displaying the profile of the tire. A computer suitably programmed with local tread requirements can also determine if the tire is acceptable or not.

30 An advantage of the present device is its simplicity of use. The bracket and arcuate housing make it easy to position against the tire so that it is stable. The computer port that

supports data transmission to a computer make the results of the measurement quickly available to the user via any computer.

Another advantage of the present invention is that it provides a tire tread profile rather than a series of single distance measurements. The profile of a tire provides more information than any single measurement and is a more reliable indicator of tread wear than a series of individual measurements, and quicker to obtain.

The IR or RF window in the base of the handle is still another feature of the present invention. This window makes it possible to avoid use of a cable when operating the present handheld tire tread profiler.

Other features and their advantages will be apparent to those skilled in the art of tread depth measurement from a careful reading of the Detailed Description of Preferred Embodiments accompanied by the following drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings,

Fig. 1 is a perspective view of the probe according to a preferred embodiment of the present invention placed against a tire;

Fig. 2 is a side, cross sectional view of a detail of the housing of the probe of Fig. 1; and

Fig. 3 is a view of a display on the computer on the probe of Fig. 1 with a sample display.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The present invention is a hand-held probe for measuring the depth of tire treads. Tire treads are integral, radial projections about the circumference of a vehicular tire separated by narrow gaps or channels from each other. Fig. 1 illustrates the present probe, indicated by reference number 10 in position for a measurement against a tire 12 with treads 14. Gaps 16 are between treads 14. Probe 10 determines the difference in radial distance between the bottom of gaps 16 and the tops of treads 14 and whether this difference meets whatever preselected requirements are imposed by the user or other authority.

Probe 10 comprises a generally cylindrical housing 20 having a proximal end 22 and a distal end 24. Housing 20 is made of light-weight tubing such as aluminum, steel, plastic such as nylon, or composite materials. A handle 30 is fitted on proximal end 22 and an

on/off button 36. Near handle is serial port 32 for connection to a small computer 40 with display 42 and controls 44 via a cable 26. Computer 40 is preferably of the size of a palmtop computer such as that sold under the brand name PALM PILOT, CASSIOPEIA or PSION. These types of computers can receive data into memory and process them for display and storage in a manner well known in the art. Stored data can later be downloaded to a different computer as desired.

Near proximal end 22 is a bracket 50 for engaging the side of tire 12 for stability and to help in aligning probe 10, as will be described more fully below. Along the major axis of housing 20 is a window 60 having a frame 62 with a slit 64 covered by an optical glass 66 to keep dust and dirt out of housing 20. The length of slit 64 should be just as wide as the widest tire to be encountered.

Housing 20 is hollow, has a concave arcuate shape along one side at 28 and is dimensioned internally to house a distance range finder 70 and a carrier assembly 80 for moving distance finder 70 along window 60 while enabling range finder 70 to measure distance (Y-coordinate) from it to tire 12 as it moves along housing 20 (X-coordinate) when probe 10 is properly positioned against tire 12. Range finder 70 sends measurement data to computer 40 by internal cable 72 for computation and display of results either through serial port 32 or IR (infrared) or RF (radio frequency) transmission window 34 in the base of handle 30. By measuring distance between the reference line, which is defined by the location of the distance finder 70 as it traverses housing 20, and the nearest point on tire 12, the tire profile along its rolling face from side to side can be determined and, by subtraction from the reference, the difference in distance between the top of treads 14 and the bottom of gaps 16. This difference will either meet or not meet a preselected criterion storable in computer 40. Computer 40 may be programmed to apply local criteria to the distance measurement and thus produce an "OK" or "NOT OK" along with the distance 92 and the profile 94, as shown in Fig. 3.

During operation, probe 10 is held against tire 12 with the plane of window 60 parallel to the tangent of tire 12 and the two edges 52, 54 of housing 20 against the surface of tire 12 and bracket 50 against the side of tire 12. This "three-point" contact allows probe 10 to have a complete view of tread 14's cross section and be stable for the measurement.

Stability is important to preserve the integrity of the line of reference to the tire defined by the movement of the range finder 70

Range finder 70, which is mounted on the inside of housing 20 can measure the distance from a reference point to any opaque object directly in front of it. Range finder 70 must have a range of operation not less than one inch in front of it and not more than two inches away from the device; that is, it must be capable of measuring the distance to an object as close as one inch and as distant as two inches away. This range allows range finder 70 to function through the thickness of the glass 64 and still have sufficient range to reach the bottom of a gap between treads of a deep truck tire. Range finder 70 must have very tight field of view so as to be able to accurately detect the edge of treads 14 and not produce false readings taken partially on top of treads 14 and partially in gaps 16.

Range finder 70 employs a diode laser light source 74 and two linear position sensors 76 arranged so as to be able to measure the distance to tire 12 when probe 10 is positioned properly against tire 12. Light source 74 is fitted with optics to produce a tightly focused light spot on tire 12. Light is projected toward tire 12 on a line which is parallel to a tire radius vector. An image of the spot on tire 12 is then focused on the linear position sensor 76. Linear position sensors 76 produce electrical signals proportional to the location of the spot on the sensor surface. The sensor is positioned at an angle to the laser so that the location of the focused spot on the sensor therefore functions as a laser triangulation distance measurement device.

The depth of gap 16 can be large compared to its width. The narrow shape of gap 16 can block the view of a single linear position sensor when the laser spot is at the bottom of gap 16. This problem is most evident when the spot drops into gap 16 with the edge of tread 14 on the same side as that position sensors. To improve measurements on in gaps 16, the present range finder 70 uses two position sensors 76. Sensors 76 are mounted at complementary angles on either side of laser light source 74. This improves the percentage of the width of the bottom of gaps 16 that can be measured.

To measure a complete cross section of tire 12, range finder 70 scans across tire 12's width carried by carrier assembly. Range finder 70 is mounted on a linear bearing 82 and guided with a rod 84 mounted parallel to the central axis of housing 20. A pulley 86, 88, is mounted at each end of rod 84 and motor-driven, toothed belt 90 is fitted between pulleys

86, 83. The motor-driven belt 90 is used to move range finder 70 along the length of rod 84 while measurement is being taken. The motor is not shown since this type of mechanism, similar to that of a printer head carrier is well known to those skilled in the art. See for example US Patent No. 5,162,916. Batteries 98 to power the range finder motor are located in handle 30.

The position of range finder 70 along rod 84 may be measured by a displacement transducer (not shown) or tracked using a stepper motor (not shown) on belt 90.

The tread profile is a data set consisting of points containing an X-coordinate which is the position of range finder 70 on guide rod 84 and a Y-coordinate which is the distance from range finder 70 to the surface of tire 12. These coordinates are transmitted to computer 40 by means of suitable and conventional data link such as cable 72.

Computer 40 can produce a plot of the data points to enable the user to ensure that the unit is functioning correctly. Display 42 shows a first plot 92 of actual distance to tire 12, a second plot 94 showing the difference in distance between a reference point on tread 14, and an indication as to whether the tread depth is sufficient or not according to a preselected criterion. Clearly various output can also be displayed from the received data, such as average and mean tread depth, minimum tread depth, and so on. Specific criteria as defined by local highway regulators may be applied to determine if the tire is passable. The measurements may also be used to predict when tire replacement will be required or the number of miles until tire replacement based on comparison with stored data about a particular tire or tires in general.

In use, probe 10 is placed against the rolling face of a tire 12 and pushed against tire 12 so that bracket 50 engages the side of tire 12 and window 60 is parallel to the tangent of tire 12 where the edges 52, 54, of probe 10 meet tire 12. Range finder 70 and carrier assembly are activated by pressing on/off button 36. Light source 74 on range finder 70 transmits a beam of well focused light onto tire 12 through window 60 and position sensors 76 adjacent light source 74 on range finder 70 perceive the distance from range finder 70 to tire 12. The data reflective of that distance are transmitted through cable 72 to computer 40 where the data is analyzed and displayed on display 42 for the operator.

It will be apparent to those skilled in the art of tread depth measurement that many modifications and substitutions can be made to the foregoing description of preferred

embodiments without departing from the spirit and scope of the present invention, defined by the appended claim.

WHAT IS CLAIMED IS:

1. A probe for measuring tread depth, said probe comprising:
a housing having a window formed therein, said housing having a proximal end and a distal end;
5 range finding means carried within said housing and oriented so that said range finder directs a beam of light through said window;
means for moving said range finding means parallel to said window;
means carried by said housing for gripping said housing;
tire-engaging means carried by said proximal end for engaging a side of a tire; and
10 means carried by said housing and in operational connection with said range finding means and said moving means for sending distance data from said laser range finding means as said laser range finding means is moved parallel to said window.
2. The probe as recited in claim 1, wherein said housing has an concave arcuate edge formed at both said proximal end and said distal end to provide support for a tire.
- 15 3. The probe as recited in claim 1, further comprising a communications port means carried by said gripping means for communicating distance data to a computer.
4. The probe as recited in claim 3, wherein said communications port means transmits distance data using an infrared transmission.
5. The probe as recited in claim 3, wherein said communications port means
20 transmits measurement data using a radio frequency transmission.
6. The probe as recited in claim 1, wherein said gripping means is a handle carried by said proximal end of said housing.
7. The probe as recited in claim 3, further comprising a handheld computer, said handheld computer in electrical communication with said range finding means, said handheld
25 computer having a display and means for plotting distance data.
8. A probe for measuring tread depth, said probe comprising:
a housing having a window formed therein, said housing having a proximal end and a distal end;
range finding means carried within said housing and oriented so that said range
30 finder directs a beam of light through said window;
means for moving said range finding means parallel to said window;

a handle carried by said proximal end of said housing; and
means carried by said housing and in operational connection with said range finding means and said moving means for sending distance data from said laser range finding means as said laser range finding means is moved parallel to said window.; and
5 communications port means carried by said handle for communicating distance data to a computer.

9. The probe as recited in claim 8, wherein said communications port means transmits measurement data using an infrared transmission.

10 10. The probe as recited in claim 8, wherein said communications port means transmits measurement data using radio frequency transmission.

11. The probe as recited in claim 8, further comprising tire-engaging means carried by said proximal end for engaging a side of a tire.

12. The probe as recited in claim 8, wherein said window is positioned in contact with the tread of a tire.

13. The probe as recited in claim 8, further comprising a handheld computer, said handheld computer in electrical communication with said range finding means, said handheld computer having a display and means for plotting distance data.

14. The probe as recited in claim 8, wherein said gripping means is a handle carried by said proximal end of said housing.

20 15. A method for measuring the tread profile of a tire, said method comprising the steps of:

scanning the rolling face of a tire to determine the tread profile;

communicating said tread profile to a computer having a display;

plotting the tread profile on said display;

25 16. The method as recited in claim 15, wherein said scanning step and communicating step is performed by a probe having a handle, said handle having a communications port that communicates said tread profile to said computer.

17. The method as recited in claim 15, wherein said tread profile is communicated to said computer using a transmission selected from the group consisting of infrared and
30 radio frequency.

18. The method as recited in claim 15, wherein said scanning step is performed by a handheld probe.

19. The method as recited in claim 15, further comprising the step of determining whether the tread profile complies with the minimum allowable tread profile listed in governmental regulations.

20. The method as recited in claim 19, further comprising the step of predicting when the tire needs replaced to comply with the minimum allowable tread profile listed in governmental regulations.

FIG. 2

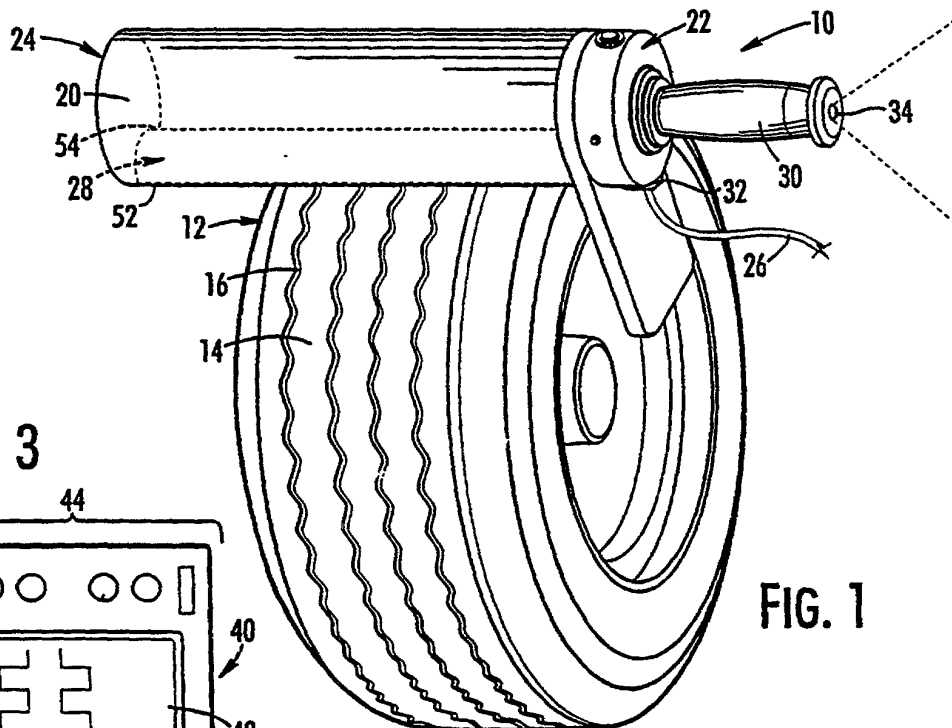
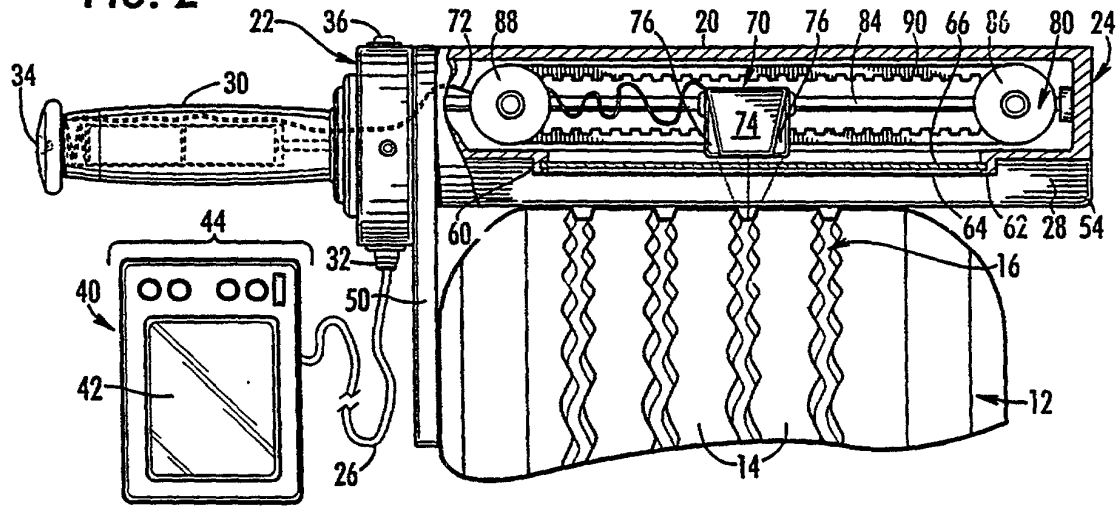


FIG. 3

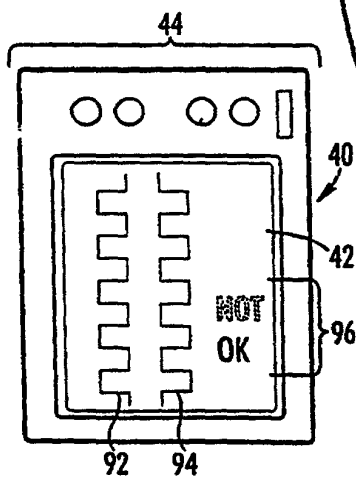


FIG. 1

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

Attorney Docket
Number: 29093-03

DECLARATION: As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Hand Held Probe for Measuring Tire Tread Wear

the specification of which:

☒ [X] is attached hereto.

☒ [X] was filed on 14 January 2000 as PCT Application Number PCT/US00/00989 and amended on _____
(if applicable.)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 (a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States listed below, and have also identified below any foreign application for patent or inventor's certificate or PCT international application having a filing date before that of the application on which priority is claimed:

Priority Claimed

(Number) _____	(Country) _____	Filed (Day/Month/Year) _____	<input type="checkbox"/> Yes <input type="checkbox"/> No
(Number) _____	(Country) _____	Filed (Day/Month/Year) _____	<input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

<u>60/115,915</u>	<u>(14.01.99)</u>	_____	_____
(Application Serial No.)	(Filing Date)	(Application Serial No.)	(Filing Date)

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

(Application Serial No.) _____	(Filing Date) _____	(Status - patented, pending, abandoned) _____
--------------------------------	---------------------	---

POWER OF ATTORNEY: I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Joseph T. Guy, Reg. No. 35,172; John B. Hardaway, III, Reg. No. 26,554; William Y. Klett, III, Reg. No. 41,903; Michael A. Mann, Reg. No. 32,825; J. Herbert O'Toole, Reg. No. 31,404; Timothy J. Slabouze, Reg. No. 47,949; Charles L. Schwab, Reg. No. 17,497; Oscar A. Towler, III, Reg. No. 33,803;

SEND ALL CORRESPONDENCE TO: Michael A. Mann, NEXSEN PRUET JACOBS & POLLARD, LLC, P.O. Drawer 2426, Columbia, South Carolina, 29202 TELEPHONE NUMBER: (803) 771-8900

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST INVENTOR (given name, family name) Roger H. Tracy
Complete Post Office Address Unit 1610, 680 North Lake Shore Drive, Chicago, IL 60611
City and Country of Residence Chicago, Illinois Citizenship US

Inventor's Signature [Signature] Date 9/20/01

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

Attorney Docket
Number: 29093-03

PAGE 2

2-00
FULL NAME OF SECOND JOINT INVENTOR Edwin H. Reeves

Complete Post Office Address 58 Lyme Bay, Columbia, South Carolina 29212

City and Country of Residence Columbia, South Carolina SC Citizenship US

Inventor's Signature Edwin H. Reeves

Date 20 - Sept - 2001

3-00
FULL NAME OF THIRD JOINT INVENTOR Nicholas J. Radclyffe

Complete Post Office Address The Old Dairy, Nup End Lane, Wingrave, Buckinghamshire HP22 4PX, England

City and Country of Residence Wingrave, England CB2 Citizenship GB

Inventor's Signature Nick Radclyffe

Date 24 Sept '01

4-00
FULL NAME OF FOURTH JOINT INVENTOR Robert Mark Longden

Complete Post Office Address The Yews, Grange Park, Northington, Hampshire S024 9TG, England

City and Country of Residence Northington, England CB2 Citizenship GB

Inventor's Signature Mark Longden

Date 24 - Sept - 01

FULL NAME OF FIFTH JOINT INVENTOR _____

Complete Post Office Address _____

City and Country of Residence _____ Citizenship _____

Inventor's Signature _____

Date _____

FULL NAME OF SIXTH JOINT INVENTOR _____

Complete Post Office Address _____

City and Country of Residence _____ Citizenship _____

Inventor's Signature _____

Date _____